



TRIMBOX®

WARNING: WHEN THE MACHINE IS RUNNING:

- Never place your fingers or the gloves or any other body part in contact with the grate or the blade.
- Never apply pressure on the grate.
- Do not use scissors, knives or any instrument above the grate.
- Safety glasses and gloves are required at all time. The gloves have to be tight enough so they don't get inside the grate slots. A loose glove is dangerous, beware!

USER'S INSTRUCTIONS:

- 1- Read carefully the security instructions (see Warnings ⚠ above) before using the machine.
- 2- Remove foam protection inside the tube before using the Trimbox.
- 3- Fix the square attachments to the Trimbox with the screws supplied for this purpose.
- 4- Fix the Trimbox with the clamps or screw it to a work table.
- 5- Fix the bag under the Trimbox, attaching it on top of the small screws on the inferior part of the machine (It will help the bag from falling).
- 6- For trimming, move the plant back-and-forth and rotate it at the same time.
- 7- In order to facilitate the trimming, spray some vegetable oil and clean the grill and blade frequently with soap. It has to be done when the machine is NOT running.
- 8- Sharpen the blade when necessary.

INFORMATIONS OR ORDERS

Visit: www.trimpro.ca
 Contact: info@trimpro.ca
 Call (Canada): +1-450-349-0811

Ref: 0209


To be used in accordance with all existing laws and regulations. The manufacturer does not accept any responsibility for damages caused to or by the TRIMBOX, resulting from an inadequate use or assembly.

Patent : CAN : 2.470.370 USA : 7.168.643 Patent pending :
 EUR: 04761713.9 AUS: 2004269786 CE Standard


www.trimpro.ca

BLADE HEIGHT

To adjust the blade, loosen the blocking screw using an Allen key 1/8", adjust the height manually and then, tighten the blocking screw.

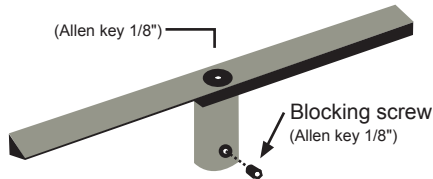


STEPS 2 & 3

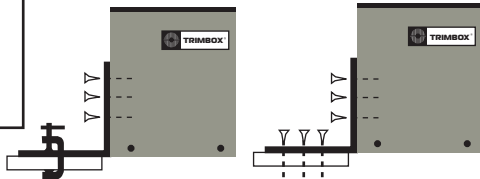

WARNING

Do not remove the blade from the hub.



SHARPENING

- 1- Put off the set screw located in the hole on the side of the aluminum hub where the blade is fixed.
- 2- Put off the blade and the hub in one piece from the motor shaft.
- 3- Clean the blade with alcohol.
- 4- Use a grindstone.
- 5- Put a gentle pressure with the top of the blade on the grindstone with the sharpening angle desired.
- 6- Pass the blade on the grindstone with a movement from left to right and from right to left until the blade is properly sharpened.
- 7- Repeat the operation with the bottom of the blade.
- 8- Put back the blade and the aluminum hub on the motor shaft.
- 9- Put back in position the set screw in the hole on the side of the aluminum hub.